

LIST OF TRAFFIC CONTROL DEVICES *

| MUTCD DEVICE NO. | NO. | FLASHERS | | REMARKS | DELINEATORS & CHANNELIZATION DEVICES | | | | | |
|------------------|-----|----------|--------|---------|--------------------------------------|-----------|----------|----------|--------|--------|
| | | TYPE A | TYPE B | | DEVICE | NO. | SIZE | FLASHERS | | |
| | | | | | | | | TYPE A | TYPE B | TYPE C |
| G20-1 | 4 | | | | BARRICADES | | | | | |
| G20-2 | 2 | | | | TYPE III | As Req'd. | 8' | 2 (Min.) | | |
| W20-1 | 4 | | | | TYPE II | | | | | |
| W20-5R | 4 | | | | TYPE I | | | | | |
| W20-5L | 4 | | | | DRUMS | | | | | |
| W4-2R | 2 | | | | SLIM LINE CHANNELIZERS | | | | | |
| W4-2L | 2 | | | | CONES | | | | | |
| W1-4R | 1 | | | | TUBES | | | | | |
| W1-4L | 1 | | | | VERTICAL PANELS | | | | | |
| W13-1 | 2 | | | | SINGLE | | | | | |
| W3-5 | 4 | | | | BACK TO BACK | | | | | |
| R4-1 | 4 | | | | PAVEMENT MARKING | WHITE | YELLOW | | | |
| R2-1 | 4 | | | | 4" BROKEN (Lin. Ft.) | | | | | |
| | | | | | 4" SOLID (Lin. Ft.) | | | | | |
| | | | | | TEMPORARY STRIPING (Line Mile) | | | | | |
| | | | | | ARROW PANEL | | | | | |
| | | | | | CONCRETE SAFETY BARRIER | | LIN. FT. | | | |

* FOR INFORMATION ONLY

See Sheet Nos. SheetNumber & SheetNumber for Traffic Control Notes.


TAPER FORMULA'S

L = S x W for speeds of 45 M.P.H. or greater.

$L = \frac{WS^2}{60}$ for speeds of 40 M.P.H. or less.

Where: L = Minimum length of taper in feet.
S = Numerical value of posted speed PRIOR to work in M.P.H.
W = Width of offset in feet.

- Channelization devices.
- ▲ Advance Warning Flashing Or Sequencing Arrow Panel

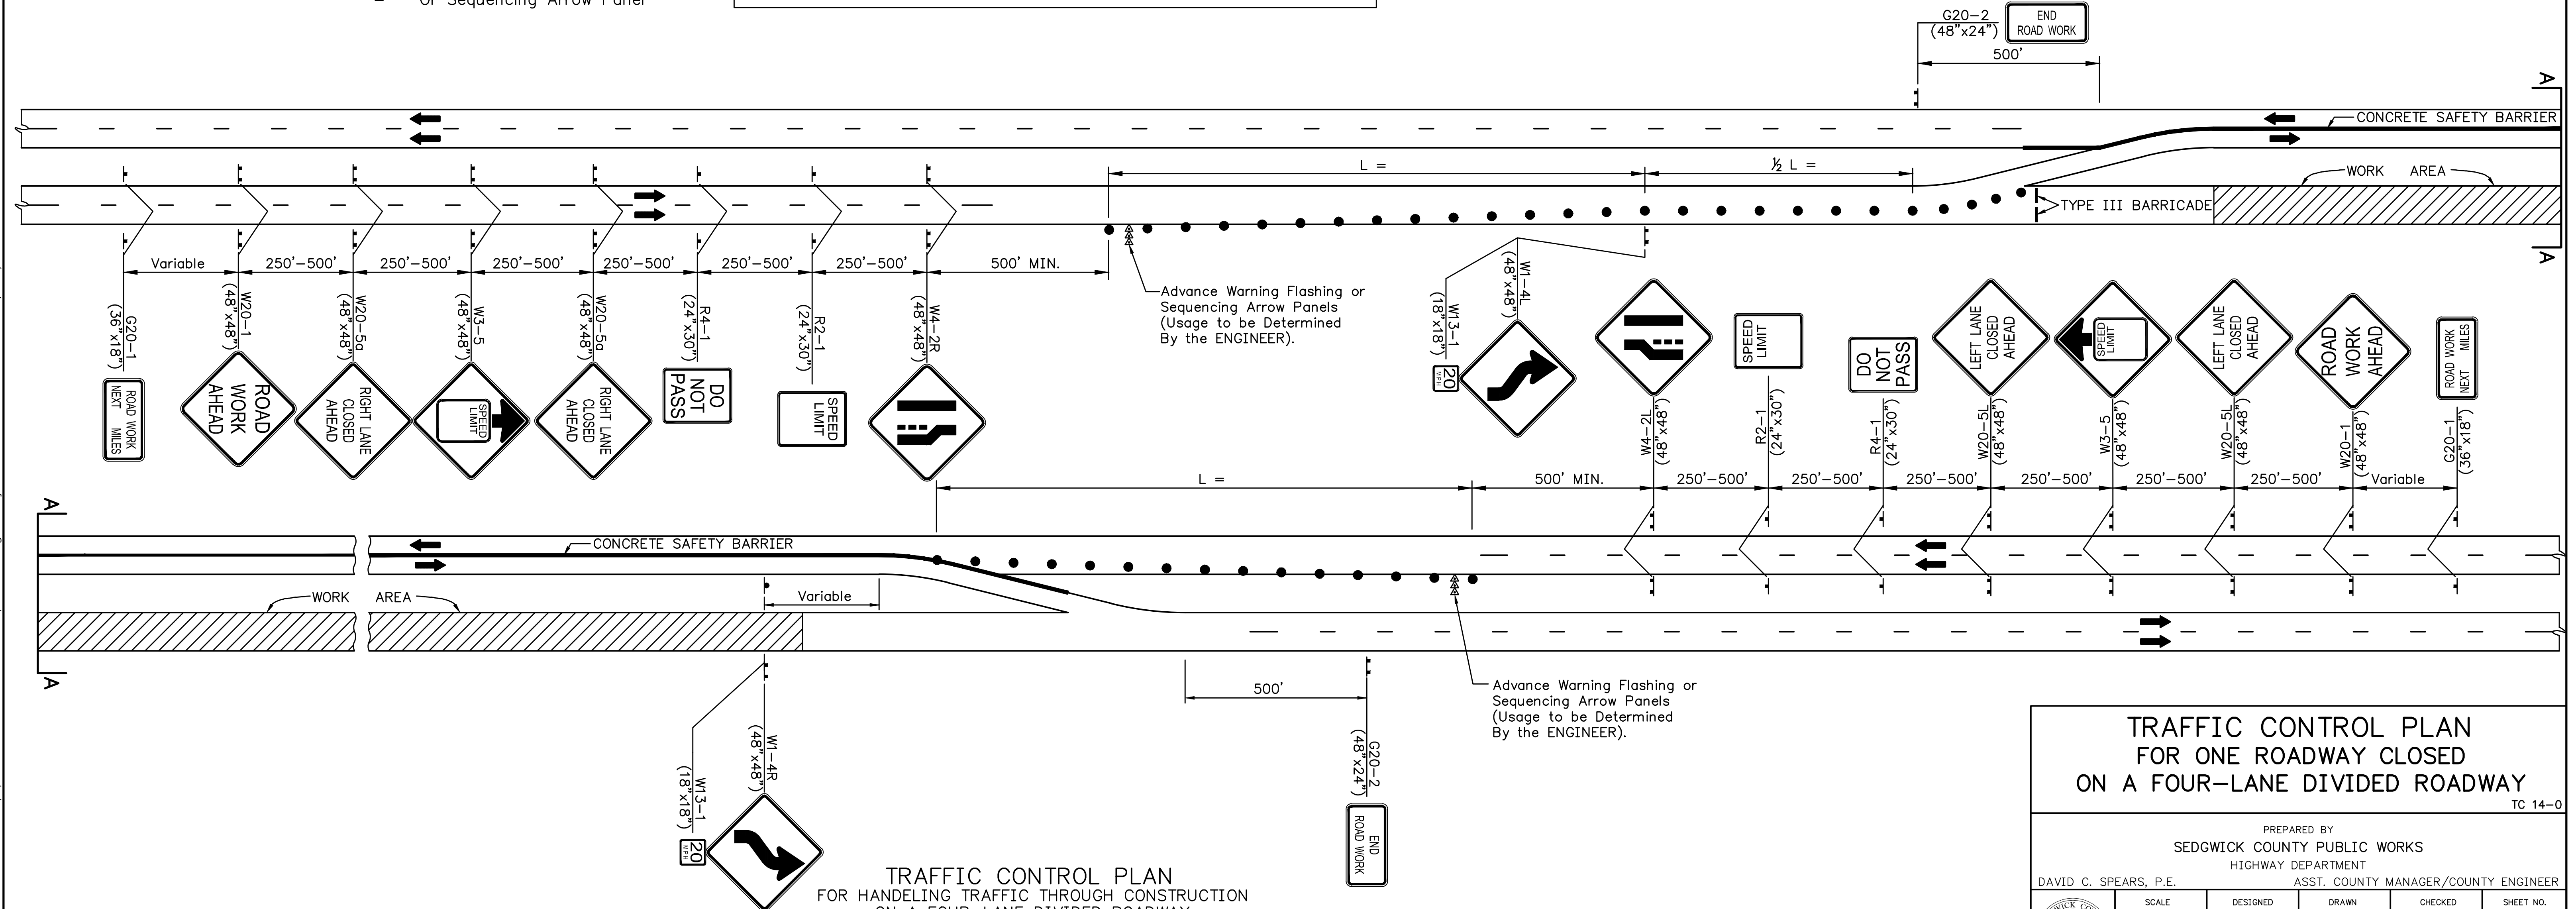

TRAFFIC CONTROL PLAN
FOR HANDLING TRAFFIC THROUGH CONSTRUCTION
ON A FOUR-LANE DIVIDED ROADWAY
ONE ROADWAY CLOSED

TRAFFIC CONTROL PLAN
FOR ONE ROADWAY CLOSED
ON A FOUR-LANE DIVIDED ROADWAY

PREPARED BY
SEDGWICK COUNTY PUBLIC WORKS
HIGHWAY DEPARTMENT
DAVID C. SPEARS, P.E. ASST. COUNTY MANAGER/COUNTY ENGINEER

| | | | | |
|-------|----------|--------|---------|-----------|
| SCALE | DESIGNED | DRAWN | CHECKED | SHEET NO. |
| NONE | M.R.B. | D.R.S. | M.R.B. | ---- |
| DATE | 4/1989 | 4/2005 | 4/2005 | |

| | | |
|----------|-----------------------------|----------|
| 11/2012 | Update Sign Symbols & Sizes | JRW /MRB |
| 5/2009 | Update Taper Formula | By /Chk |
| Rev.Date | Description | By /Chk |