


Let us put our 35+ years of audio/video recording experience to work for you.

## JAVS Centro-HDX brings high-definition video switching and routing to new and existing Centro systems

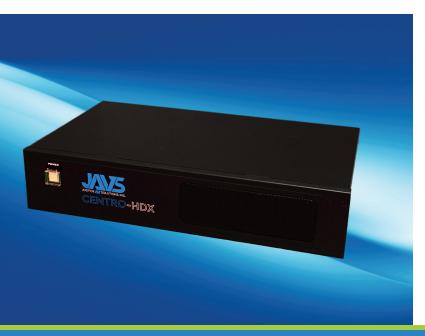


## HIGH DEFINITION VIDEO SWITCHING

JAVS Centro-HDX brings 12 channels of professional 1080P high-definition video switching and routing to courtrooms. Fully switched video, picture-in-picture, multi-view layouts and more are routable to the 6 HD-SDI and 3 HDMI outputs.

Centro-HDX enhances video conferencing and the video routing in evidence presentation systems. Deliver production quality HD video to courtroom participants in the room and to remote participants on video calls.

All video signals in the courtroom can now be managed from a single unit. Provide a more lifelike clarity and detail to your video conferencing, remote interpretation, digital recording and evidence presentation systems.

## **CUTTING EDGE FEATURES UNLIKE ANY OTHERS!**



Full HD digital video switcher to meet the needs of modern-day courtroom AV users.



Video switching is automatically handled by the Centro-HDX when an attached microphone detects a person speaking.



HD video conferencing capabilities deliver more than 6 times the resolution to improve the quality of remote appearances.



Scalable and configurable solution that accommodates up to 12 video inputs and 9 video outputs.

Ready to learn more about how the Centro-HDX audio/video processor can help you capture an accurate A/V record for your justice needs?





## **Centro-HDX Product Specifications**

Model Name	Centro-HDX
Product Name	HD 12-Channel Digital Video Switcher
Video Standard	Full HD
Video Format	1080p 50/59.94/60 1080i 50/59.94/60 720p 50/59.94/60
Video Processing	SDI: 4:2:2 HDMI: YUV 4:2:2, RGB: 4:4:4
Video Input	8x SDI, 4x HDMI
Computer Graphics Interface	4 via HDMI
Video Output	6x SDI assignable: Multiview, Inputs 1-12 3x HDMI assignable: Multiview, Inputs 1-12
Built-In Multi-View Monitoring Out	HDMI
Audio Input	4X Balanced XLR
Audio Output	2X Balanced XLR
Embedded Audio Support	Embedded 4-CH Audio Output
Picture in Picture	Capable of up to 4 PIP
Logo Insertion	2
Sync/Reference In/Out	Built-in Genlock Support external sync with loop thru
PC Remote Control	Via Ethernet
Chassis	2 units, 2RU Rack-Mount Mainframe
Power	DC 12V 69W

